




Ordering Information

LIQUID-TUFF™

Ultraflex Liquidtight

Full Engineering Specifications Page 49


Description


- (1) Non-UL liquidtight raceway
- (2)  component, extra-flexible non-metallic mechanical protection tubing
 - Corrugated flame resistant PVC with integral reinforcing member
 - Non-conductive raceway

Temperature Rating


- 60°C Dry
- 60°C Wet and oily

Applications

-  recognized component for use in protection of insulated wire in assemblies or consoles of electrical apparatus. Use is to be determined by Underwriters Laboratories Inc.
- Non-UL liquidtight raceway

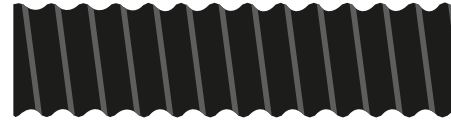

References & Ratings

-  recognized component Liquidtight Mechanical Protection Tubing under UL File Number E79977

Ordering Information

Product Dimensions/ Bend Radius

Product Code	Trade Size (inches)	Trade Size (mm)	Coil Length (feet)	Reel Length (feet)	Approx. Weight/100 feet (pounds)	Internal Diameter (min/max) inches	External Diameter (min/max) inches	Bend Radius (inches)
160-012	3/8	12	100'	—	5	0.484/0.504	0.695/0.705	0.49
160-016	1/2	16	100'	—	8	0.622/0.642	0.825/0.835	0.63
160-021	3/4	21	100'	—	11	0.820/0.840	1.035/1.045	0.83
160-026	1	27	100'	—	16	1.041/1.066	1.297/1.308	1.10
160-035	1¼	35	100'	—	21	1.380/1.410	1.640/1.650	1.40
160-040	1½	41	100'	—	26	1.575/1.600	1.877/1.888	1.59
160-051	2	53	100'	—	33	2.020/2.045	2.352/2.363	2.04

NOTE: All dimensions and weights are subject to normal manufacturing tolerances.