

Kaf-Tech Metallic Whips Type UL

Conduit

Galvanized Type RW Steel Flexible Metal Conduit

Conductors

Solid or Stranded Copper
 THHN 14AWG and Larger
 18 & 16AWG TFN/TFFN

Maximum Temperature Rating

90°C (Dry)

Grounding

NEC® 250.118(5) Many Styles with Green Grounding Conductor

Maximum Voltage Rating


600V

References & Ratings

- UL 66, 83 and 348, File No. E96572



| Description | Part Number | Units per Package | Description | Part Number | Units per Package | | | |
|-------------------------|------------------|-------------------|----------------------------|------------------|-------------------|---------|---------|-----|
| Solid Conductors | | | Stranded Conductors | | | | | |
| 3/8 F x 6 | 18-2 | 4521-21 | 30 | 3/8 F x 6 | 18-2 | 4621-21 | 30 | |
| | 18-2 | 4521-30 | 100 | | 18-2 | 4621-30 | 100 | |
| | 16-2 | 4511-21 | 30 | | 16-2 | 4611-21 | 30 | |
| | 16-2 | 4511-30 | 100 | | 16-2 | 4611-30 | 100 | |
| | 14-2 | 4501-21 | 30 | | 14-2 | 4601-21 | 30 | |
| | 14-2 | 4501-30 | 100 | | 14-2 | 4601-30 | 100 | |
| 3/8 F x 6 | 12-2 | 4578-21 | 30 | 12-2 | 4678-21 | 30 | | |
| | 12-2 | 4578-30 | 100 | 12-2 | 4678-30 | 100 | | |
| | 3/8 F x 6 | 18-3 | 4522-21 | 30 | 3/8 F x 6 | 18-3 | 4622-21 | 30 |
| | | 18-3 | 4522-30 | 100 | | 18-3 | 4622-30 | 100 |
| | | 16-3 | 4512-21 | 30 | | 16-3 | 4612-21 | 30 |
| | | 16-3 | 4512-30 | 100 | | 16-3 | 4612-30 | 100 |
| 14-3 | | 4502-21 | 30 | 14-3 | | 4602-21 | 30 | |
| 14-3 | | 4502-30 | 100 | 14-3 | | 4602-30 | 100 | |
| 3/8 F x 6 | 12-3 | 4579-21 | 30 | 12-3 | 4679-21 | 30 | | |
| | 12-3 | 4579-30 | 100 | 12-3 | 4679-30 | 100 | | |
| | 3/8 F x 6 | 18-4 | 4523-21 | 30 | 3/8 F x 6 | 18-4 | 4623-21 | 30 |
| | | 18-4 | 4523-30 | 100 | | 18-4 | 4623-30 | 100 |
| | | 16-4 | 4513-21 | 30 | | 16-4 | 4613-21 | 30 |
| | | 16-4 | 4513-30 | 100 | | 16-4 | 4613-30 | 100 |
| 14-4 | | 4503-21 | 30 | 14-4 | | 4603-21 | 30 | |
| 14-4 | | 4503-30 | 100 | 14-4 | | 4603-30 | 100 | |
| 3/8 F x 6 | 12-4 | 4580-21 | 30 | 12-4 | 4680-21 | 30 | | |
| | 12-4 | 4580-30 | 100 | 12-4 | 4680-30 | 100 | | |
| | 1/2 F x 6 | 14-2 | 4701-15 | 15 | 1/2 F x 6 | 14-2 | 4801-15 | 15 |
| | | 14-2 | 4701-24 | 50 | | 14-2 | 4801-24 | 50 |
| | | 12-2 | 4704-15 | 15 | | 12-2 | 4804-15 | 15 |
| | | 12-2 | 4704-24 | 50 | | 12-2 | 4804-24 | 50 |
| 1/2 F x 6 | 14-3 | 4702-15 | 15 | 1/2 F x 6 | 14-3 | 4802-15 | 15 | |
| | 14-3 | 4702-24 | 50 | | 14-3 | 4802-24 | 50 | |
| | 12-3 | 4705-15 | 15 | | 12-3 | 4805-15 | 15 | |
| | 12-3 | 4705-24 | 50 | | 12-3 | 4805-24 | 50 | |
| 1/2 F x 6 | 14-4 | 4703-15 | 15 | 1/2 F x 6 | 14-4 | 4803-15 | 15 | |
| | 14-4 | 4703-24 | 50 | | 14-4 | 4803-24 | 50 | |
| | 12-4 | 4706-15 | 15 | | 12-4 | 4806-15 | 15 | |
| | 12-4 | 4706-24 | 50 | | 12-4 | 4806-24 | 50 | |

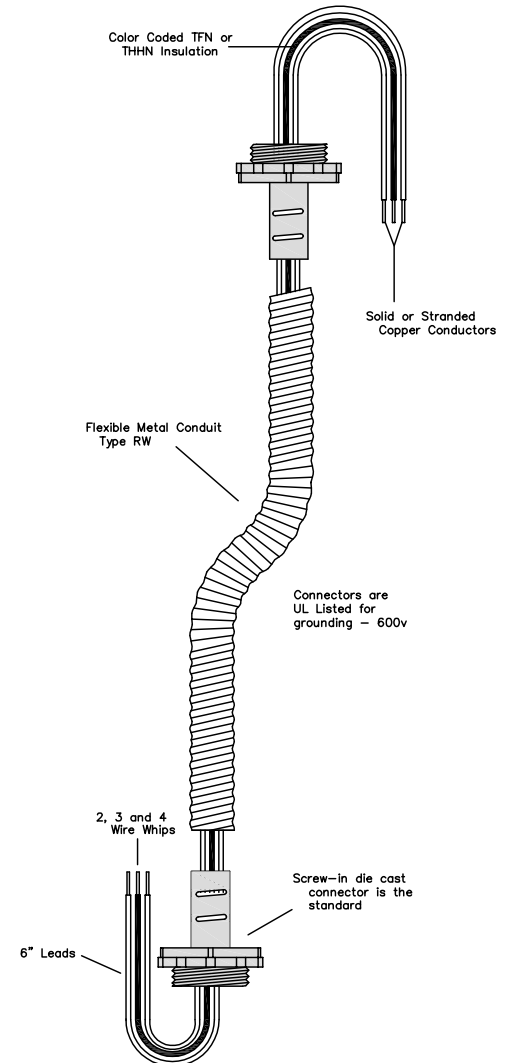

Whips come with standard 120/208V color THHN conductors but are also available with 277/480V colors if specified on order.

3/8" whips have screw in die cast connectors on the 18AWG, 16AWG & 14AWG and set screw die cast for the 12AWG. 1/2" whips have screw in die cast connectors.

Available with customer specified connectors by special order.

2 conductor is Black, White.

3 conductor is Black, White, Green.

4 conductor is Black, White, Red, Green.

All whips are available in barrels and cartons.