

## Bare Armored Ground Cable Technical Specifications



**Armor**

Interlocked Galvanized Steel Strip

**Conductors**

Solid 8 AWG and 6 AWG Copper  
7 Strand 4 AWG Copper


**References & Ratings**

- UL 467 E82631
- NEC® 250.118(1), 250.64(B)

Product Code Stock Items		Trade Size	Length (ft)		Approx. Weight/ 1,000ft (lbs)	Approx. Armor O.D. (in)
Coil	Reel		Coil	Reel		
<b>Bare Armored Ground Cable</b>						
1301-42-00	1301-60-00	8-1 Solid	250'	1000'	180	0.470
1302-42-00	1302-60-00	6-1 Solid	250'	1000'	210	0.470
1303-42-00	1303-45-00	4-1 Stranded	250'	500'	284	0.530

NOTE: All dimensions and weights are subject to normal manufacturing tolerances

## Armored Thermostat Cable

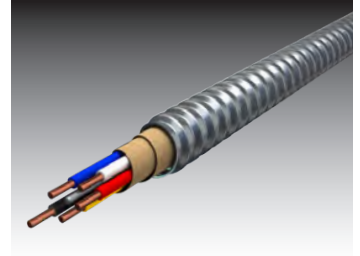

**Armor**

Galvanized Steel Interlocked Armor

**Conductors**

Solid Copper

**Insulation**

Type TFN

**Assembly Covering**

Moisture Resistant Fire Retardant Paper Wrap

**Maximum Temperature Rating**

90°C (Dry)

**Maximum Voltage Rating**

600V

Product Code Stock Items		Trade Size	Length (ft)		Approx. Weight/ 1,000ft (lbs)	Approx. Armor O.D. (in)
Coil	Reel		Coil	Reel		
<b>Armored Thermostat Cable</b>						
2501-42-00	2501-60-00	18-2 (Black, White)	250	1000	135	0.47
2502-42-00	2502-60-00	18-3 (Black, Red, White)	250	1000	142	0.47
2503-42-00	2503-60-00	18-4 (Black, Red, Blue, White)	250	1000	149	0.47
2504-42-00	2504-60-00	18-5 (Black, Red, Blue, Yellow, White)	250	1000	157	0.47
2505-42-00	2505-60-00	18-6 (Black, Red, Blue, Yellow, Orange, White)	250	1000	172	0.492
2506-42-00	2506-60-00	18-8 (Black, Red, Blue, Yellow, Orange, Brown, Purple, White)	250	1000	196	0.517